

## PWX1 Series

Explosion Proof Stainless Steel Pressurized Washer System



### Main Features

---



Stainless Steel 316L  
material frame  
construction




Ex II 2G Ex db IIC T6 Gb /  
Ex II 2D Ex tb IIIC T80°C Db



Operating  
Temperature -40°C to  
60°C



10 liters washer fluid  
capacity



20 meters maximum  
pumping head height





Design for ease of  
installation and  
maintenance

## Technical Data


General	
Solenoid Valve Certification	Ex db IIC T6 or T5 or T4 Gb / Ex tb IIIC T80°C or T85°C or T130°C Db, IP67 (options for other certification type of solenoid valve are available)
Operating Temperature	-60°C ≤ Ta ≤ +65°C or +80°C or +100°C (refer to the above T class ratings)
Mechanical	
Material	Stainless Steel 316L frame construction
Tank Capacity	10 liters
Operating Pressure	Maximum 4.5 bar
Pump Head Height	Maximum 20 meters
Overall Dimension (WxHxD)	340 × 650 × 260mm
Weight (empty)	12kg
Electrical	
Operating Voltage	24VUC (universal current, AC and DC) (options for 110VAC or 230VAC upon request)
Power Consumption	10W max

## Outline Dimensions (mm)

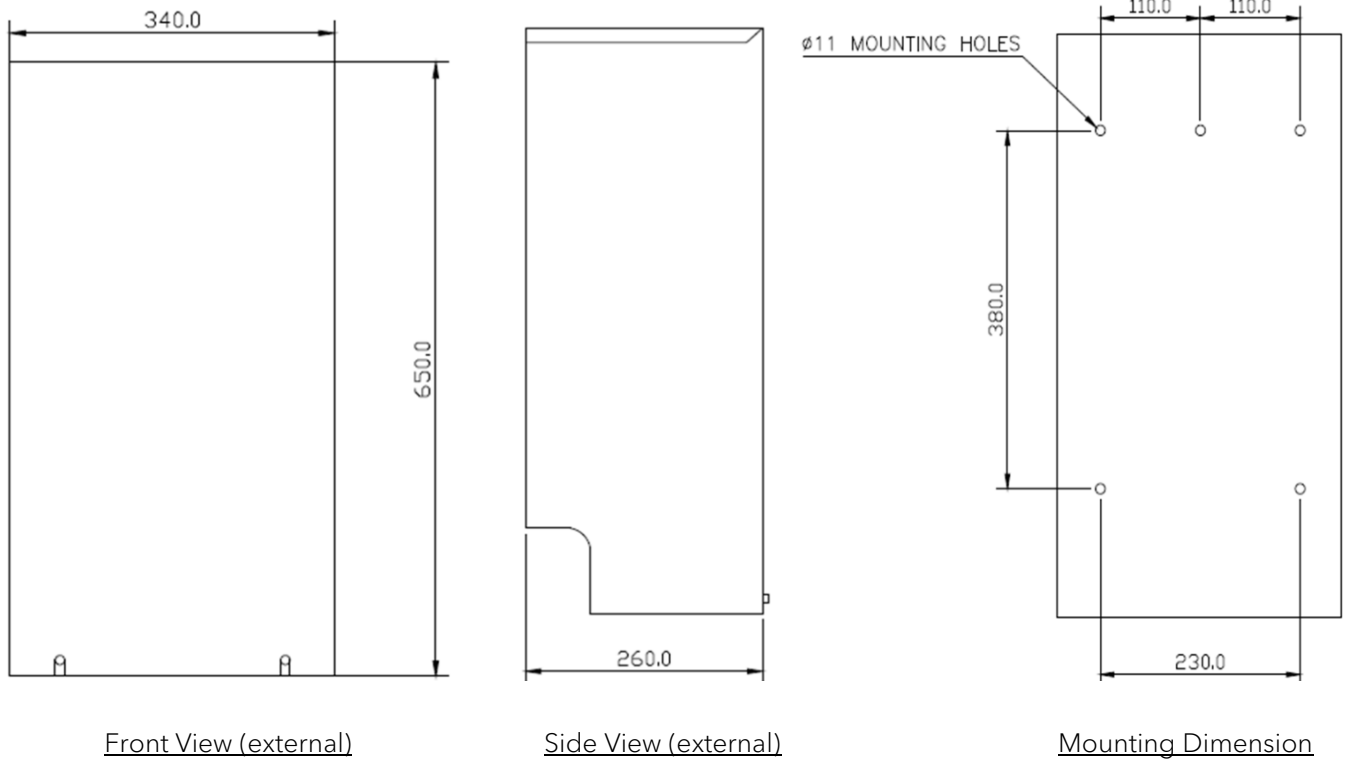

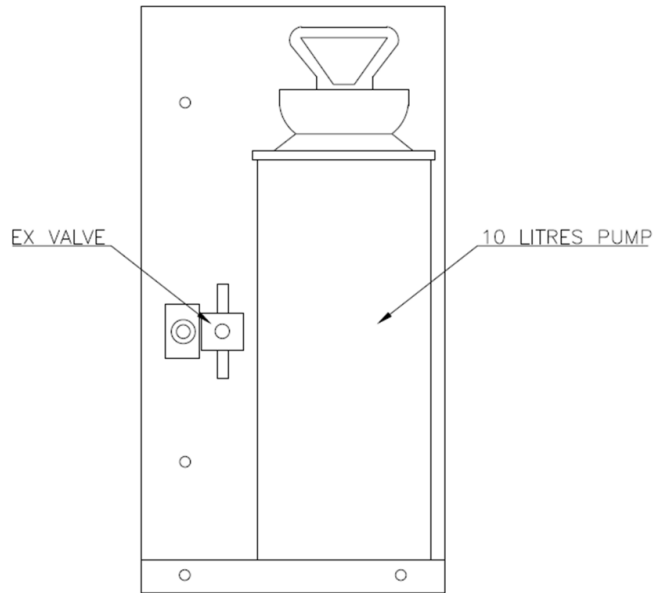

Front View (Internal)

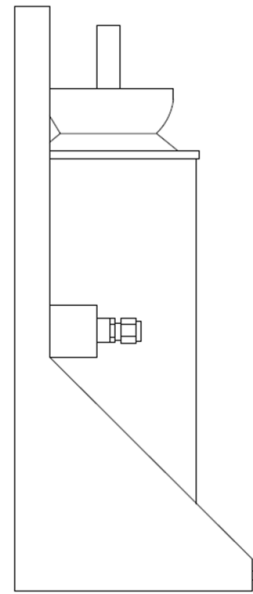

Front View (Internal)

## Model & Ordering Code

---

# PWX1 - 316L